


Kinghelm®

REV. NUMBER		DESCRIPTION		DWN	CHK	DATE
A		DESIGN				

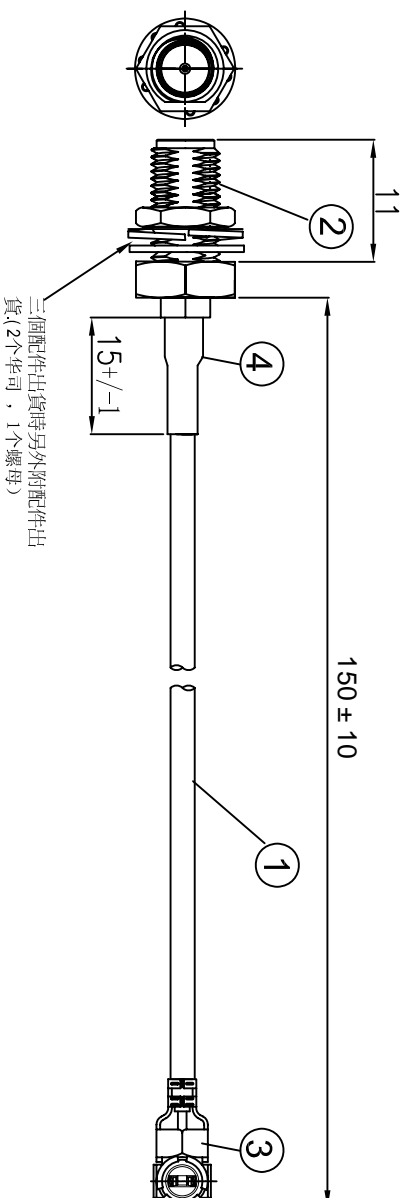

三個配件出貨時另外附配件出貨(2個熱縮, 1個螺母)

NOTES:

1. ELECTRICAL:
 - 1.1. VOLTAGE RATING:DCV 300V 10MS
 - 1.2. CONDUCTANCE RESISTANCE:3.0 OHM/MAX.
 - 1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.
 - 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - 1.5. IT SHOULD BE NO ANY OPENS/SHORT, MISWIRING AND INTERMITTENT FAILURES
2. MATERIAL:
 - 2.1. SEE TABLE
3. MECHANICAL:
 - 3.1. SMA PULL FORCE: 12.0KGS.
4. ALL COMPONENTS ARE ROHS COMPLIANT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
④	套管	黑色热缩套管, OD:2.0MM	AS
③	端子	高仿I-PEX, 1.13端子, 镀镍	1
②	接头	SMA母头内孔, 分体, 11牙, 镀金	1
①	同轴线	RF 1.13灰色线,OD:1.13mm	AS

深圳市金航标电子有限公司

WWW.BDS666.COM

KHB150-39(11)-28

0755-83044319

ALL DIMENSION ARE IN MM	DRAWN	DATE	TITLE
ARE IN MM	Janny	2018/05/04	RF CABLE
COMPUTER GENERATED IN SOLIDWORKS	ENG.		I-PEX 1.13 TO SMA / F L=150 MM
DO NOT SCALE THIS DRAWING	MFG.		
	Q.A.		
PROJECTION	GENERAL TOLERANCE FOR ANGLES XX XXX XXXX ± 1° ± 0.3 ± 0.25 ± 0.150		
CUSTOMER PIN:	SCALE: Free	TYPE	SHEET 1 OF 1

