


REVISIONS				
REV. NUMBER	DESCRIPTION	DWN	CHK	DATE
A	DESIGN			

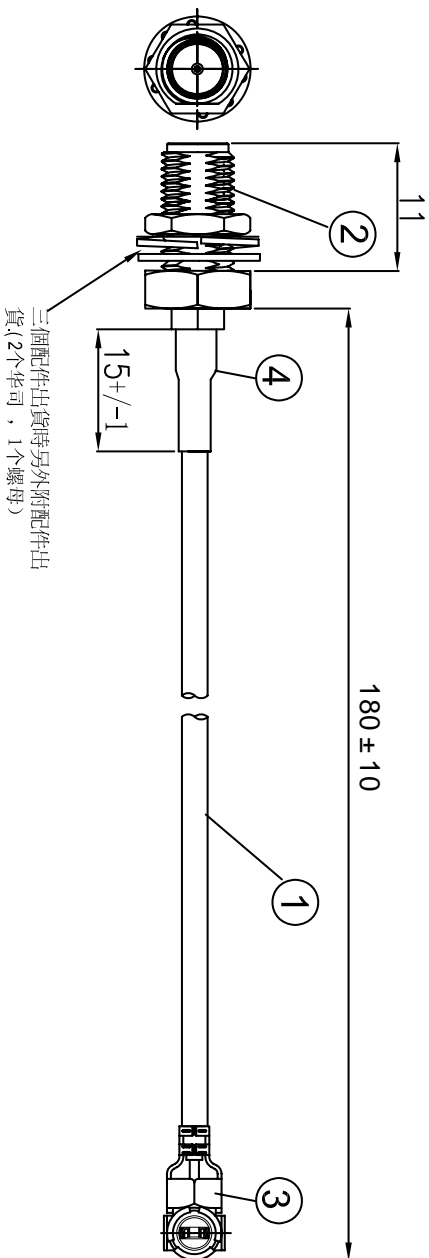

三個配件出貨時另外附配件出貨(2个华司, 1个螺母)

NOTES:


1. ELECTRICAL:
  - 1.1. VOLTAGE RATING:DCV 300V 10MS
  - 1.2. CONDUCTANCE RESISTANCE:3.0 OHM/MAX.
  - 1.3. INSULATION RESISTANCE:5.0M OHM/MIN.
  - 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
  - 1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES
2. MATERIAL:
  - 2.1. SEE TABLE
3. MECHANICAL:
  - 3.1. SMA PULL FORCE: 12.0KGS.
4. ALL COMPONENTS ARE ROHS COMPLIANT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
④	套管	黑色热缩套管, OD:2.0MM	AS
③	端子	高仿I-PEX, 1.13端子, 镀金	1
②	接头	SMA母头内孔, 分体, 13牙, 镀金	1
①	同轴线	RF 1.13灰色线,OD:1.13mm	AS

深圳市金航标电子有限公司 WWW.BDSS666.COM

KHB180-37(13)-28 0755-83044319

ALL DIMENSION ARE IN MM	DRAWN	DATE	TITLE
	Jamy	2018 /05 /04	RF CABLE I-PEX 1.13 TO SMA /F L=180 MM
COMPUTER GENERATED IN SOLIDWORKS	ENG.		SIZE Number
DO NOT SCALE THIS DRAWING	MFG.		B
	Q.A.		SCALE: Free
PROJECTION			TYPE
			SHEET 1 OF 1
			REV A



GENERAL TOLERANCE FOR ANGLES X.X ± 1° X.XX ± 0.3 X.XXX ± 0.150

CUSTOMER P/N: