
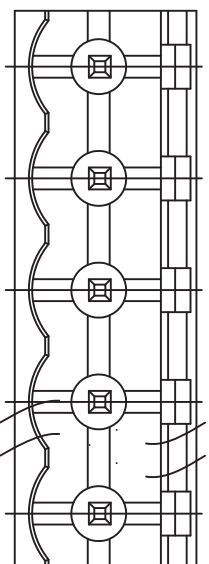


SECTION:A-A

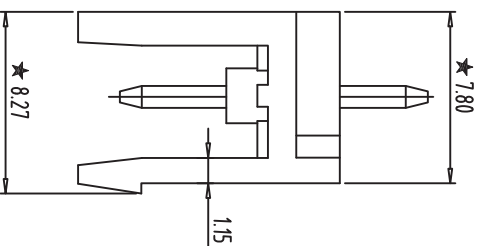

- NOTES:
1. Rating:300V 15A ;
  2. Insulation Withstands Voltage: AC2000V/MIN
  3. Insulation Resistance: 500MΩ or more at DC500V
  4. Using Temperature Range: -40°C~+105°C
  5. "★" is the important dimension
  6. RoHS compliance

Total Pitch Tolerances		Nominal dimension range																									
In mm		In mm																									
0	over	0	over	30	over	53	over	70	over	90	over	115	over	150	over	250	over	350	over	500	over	700	over	1000	over		
±0.18	to	±0.20	to	±0.25	to	±0.3	to	±0.35	to	±0.44	to	±0.50	to	±0.60	to	±0.70	to	±0.85	to	±1.00	to	±1.20	to	±1.50	to	±2.00	to

Tolerance		Nominal dimension range	
In mm		In mm	
0	over	0	over
±0.18	to	±0.20	to
±0.25	to	±0.3	to
±0.35	to	±0.44	to
±0.50	to	±0.60	to
±0.70	to	±0.85	to
±1.00	to	±1.20	to
±1.50	to	±2.00	to

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	SK	DATE	2014/08/19	SIZE	A4
CHK	DATE	SCALE	3:1	UNITS	mm
APP.	DATE	SCALE	3:1	SHEET/OF	1/1

深圳市金航标电子有限公司  
KH-F400V-7P-5.08G  
WWW.BDS666.COM  
0755-83044319